

Solarspot® D-25

Tubular daylighting system

This system is designed for small residential applications and smaller areas of commercial buildings. The D-25 will fit into most building structures avoiding structural alterations thanks to its small diameter of Ø250 mm.

Solarspot® D-25 application examples


- Kitchens, living rooms, walk-in closets, landings,
- Hallways, corridors and staircases
- Bathrooms and en suites

Solarspot® D-25 Components and accessories

- Available in two-tube base kits 300+300 mm
- Elongation tubes available; 300, 400, 600 and 1200 mm
- Electronic light regulator Dimmer NOTTEDI™
- Combined ventilation systems
- **LEDSOLARSPOT®** combined intelligent LED options
- Full range of round or square diffusers
- Full range of flashings (roof exits)

Solarspot® D-25 System benefits

- Canvas® anticondensation tray for superior thermal performance
- Optical device RIR® (optical funnel) for increased daylight capture in all light conditions (clear sky / overcast sky)
- Vegalux2™ elongation tubes and angle adapters
- All systems supplied fully assembled for a fast and easy installation (excludes extension tubes)

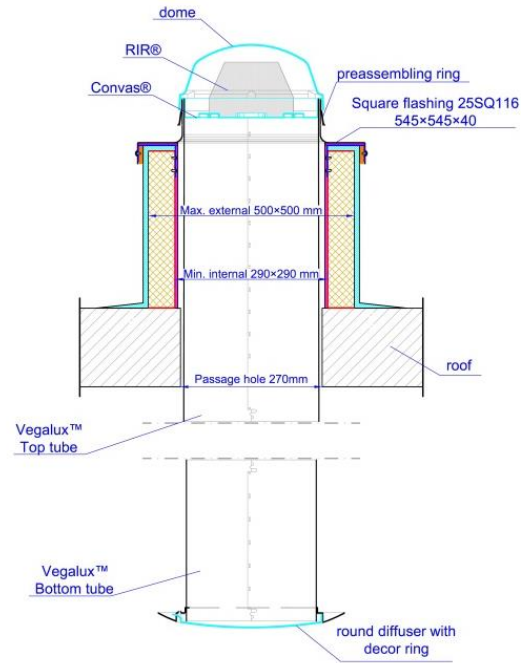

System specification - Solarspot® D-25

Tube diameter	250 mm
Recommended for areas up to	12 m ² /unit
Potential tube length	~10 m

Dome in acrylic polymer, UV resistant, anti-choc, anticondensation tray Canvas® and optical device RIR®, Vegalux2™ elongation tubes, Flashings in aluminum or PVC



Wide range of diffusers available
 Round with or without ceiling ring
 With round/square transition box for false ceilings

SOLARSPOT® D-25 is available with a range of flashings suitable for any type of roofing